


STICKY TAPE (SIZE: 80MM*50M)

Product Descriptions

Stick Tape (Size: 80MM*50M) is a PET based pressure sensitive adhesive designed to bonding end laps of waterproof membrane.

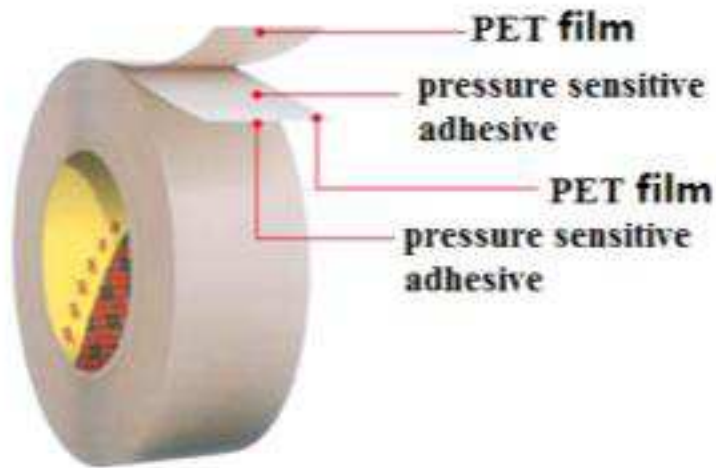

Sticky Tape (Size: 80MM*50M) profile

Products type	Usage
25mm × 60 m roll	End laps
80mm × 60 m roll	Strips
1m × 60 m roll	Large area construction

Technical Data/ Typical Properties

Test Item	Test Standard	Typical values
Flexibility at low temperature, -25°C	GB 12953-2003	No Cracking
Peeling Strength, PE membrane	JC863-2000	1.8N/mm
Peeling Strength, C50 concrete	JC863-2000	0.8N/mm

Features and benefits

- Waterproof- provides effective protection against ground water.
- Adhesive- effective sealing.
- Wide range of application- effect on plastic, rubber and concrete surface.
- Low temperature resistance- function extremely well under adverse condition.

Vertical Application

- Apply tape continuously from high point to low point.
- Apply in three sections (top, middle and bottom) on the substrate, if the length is over 2.4m.

Horizontal Application

- Apply tape every 3m on the substrate.
- Shorten adhesive distance as necessary.

Special Notes

- Substrate must be completely clean. All grease, moisture, oil, dust, substrate coatings and other contaminants should be removed.
- Press tape firmly at all terminations with steel roller or hardwood tool to maximize adhesion.

Packaging, Storage and Safety

- Protect the materials from all moisture and direct sunlight. The materials should also be free from acid, alkali, oil and organic solvent.
- Stored at ambient temperatures below 45°C.
- 3040 tapes are subject to a shelf life of one year when stored in undamaged, unopened containers. Read product label and Materials Safety Data Sheet before use.